


# DOUBLE BRIDGE COMBINER

FDT/3000 - 4000 - 8000 - 10K

SPECIAL VERSION FOR LIMITED SPACING FREQUENCIES

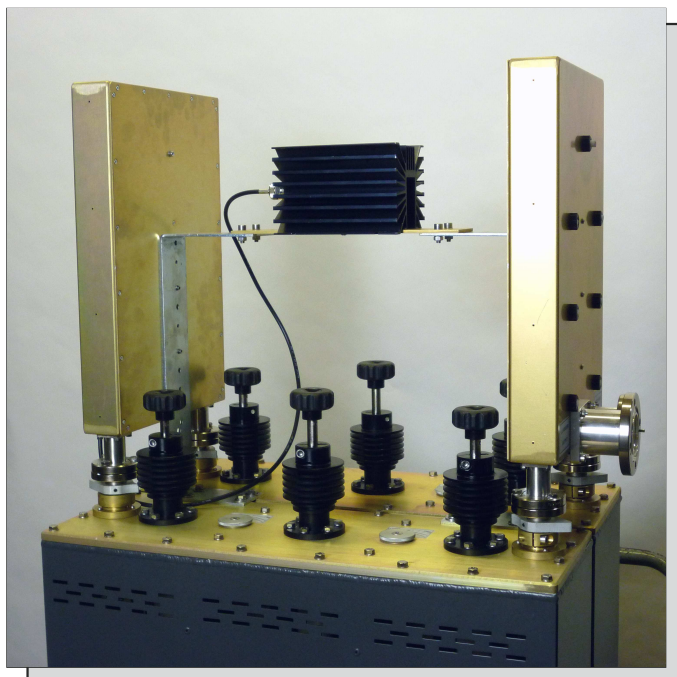

Mod.	Freq. Mhz	Imped	SWR	Att.	Conn. In/out	Power	Isol.	Dimens. Cm	Weight
FDT/3000	87.5-108	50 ohm	< 1.15:1	<0.6 db	N - 7/16 7/8	1+2KW	>35db	46x42x146	47Kg
FDT/4000	87.5-108	50 ohm	< 1.15:1	<0.6 db	7/16-7/8	2+2KW	>35db	66x42x146	65Kg
FDT/8000	87.5-108	50 ohm	< 1.15:1	<0.5 db	7/8-1+5/8	4+4KW	>35db	68x42x146	70Kg
FDT/10K	87.5-108	50 ohm	< 1.15:1	<0.5 db	7/8- 3+1/8	5+5KW	>35db	70x90x135	85Kg

## NOTE:

They are composed of two Triple Coaxial Cavity Filters and two Hybrid Couplers, including a Narrow band and a Wide band input lines.

Make sure to specify center frequency when ordering.

